


Produits > Instrumentation > Raccords double bague > Adaptateur

Adaptateur Femelle NPT par Mâle BSPP

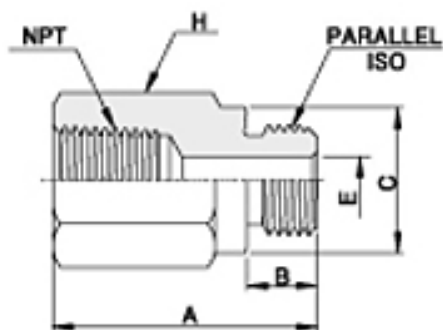

Référence	Dimension A	Dimension B	Dimension C	Dimension E	Dimension H (Hex)	NPT Thread Size	Thread Size BSP/ISO
H-MFAB-2GN-S316	24.9 mm	7.1 mm	13.7 mm	4.1 mm	14.2 mm	1/8 in	1/8-28 (228/1) in
H-MFAB-2GN-BRAS	24.9 mm	7.1 mm	13.7 mm	4.1 mm	14.2 mm	1/8 in	1/8-28 (228/1) in
H-MFAB-2GN-STEL	24.9 mm	7.1 mm	13.7 mm	4.1 mm	14.2 mm	1/8 in	1/8-28 (228/1) in
H-MFAB-4GN-S316	33.3 mm	11.2 mm	17.8 mm	5.8 mm	19.05 mm	1/4 in	1/4-19 (228/1) in
H-MFAB-4GN-BRAS	33.3 mm	11.2 mm	17.8 mm	5.8 mm	19.05 mm	1/4 in	1/4-19 (228/1) in
H-MFAB-4GN-STEL	33.3 mm	11.2 mm	17.8 mm	5.8 mm	19.05 mm	1/4 in	1/4-19 (228/1) in
H-MFAB-6GN-S316	37.8 mm	11.2 mm	21.8 mm	7.9 mm	22.2 mm	3/8 in	3/8-19 (228/1) in
H-MFAB-6GN-BRAS	37.8 mm	11.2 mm	21.8 mm	7.9 mm	22.2 mm	3/8 in	3/8-19 (228/1) in
H-MFAB-6GN-STEL	37.8 mm	11.2 mm	21.8 mm	7.9 mm	22.2 mm	3/8 in	3/8-19 (228/1) in
H-MFAB-8GN-S316	43.9 mm	14.2 mm	26.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (228/1) in
H-MFAB-8GN-BRAS	43.9 mm	14.2 mm	26.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (228/1) in
H-MFAB-8GN-STEL	43.9 mm	14.2 mm	26.1 mm	11.9 mm	26.9 mm	1/2 in	1/2-14 (228/1) in

Référence	Dimension A	Dimension B	Dimension C	Dimension E	Dimension H (Hex)	NPT Thread Size	Thread Size BSP/ISO
H-MFAB-12GN-S316	50.8 mm	15.7 mm	31.5 mm	15.7 mm	33.3 mm	3/4 in	3/4-14 (228/1) in
H-MFAB-12GN-BRAS	50.8 mm	15.7 mm	31.5 mm	15.7 mm	33.3 mm	3/4 in	3/4-14 (228/1) in
H-MFAB-12GN-STEL	50.8 mm	15.7 mm	31.5 mm	15.7 mm	33.3 mm	3/4 in	3/4-14 (228/1) in
H-MFAB-16GN-S316	53.1 mm	18.3 mm	38.9 mm	19.8 mm	41.2 mm	1 in	1-11 (228/1) in
H-MFAB-16GN-BRAS	53.1 mm	18.3 mm	38.9 mm	19.8 mm	41.2 mm	1 in	1-11 (228/1) in
H-MFAB-16GN-STEL	53.1 mm	18.3 mm	38.9 mm	19.8 mm	41.2 mm	1 in	1-11 (228/1) in