


Produits > Hydraulique > Raccords > DIN 2353 - 24° > Raccords de réduction

Réduction filetée avec joint mou REDSDN

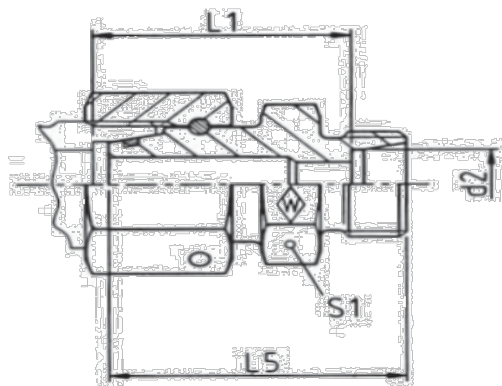

Série	Bar (psi)	D1	Tube d2	Désignation	Réf.	Kg par 100 p.	L5	L2	L1	S1	S2	S3	Joint tonique
S	420 (6091)	25	6	REDSDN 25/6 S	WAL619096	33,0	41	53	38,5	36	17	46	22,3 x 2,4
S	420 (6091)	25	8	REDSDN 25/8 S	WAL619097	33,0	41	53	38,5	36	19	46	22,3 x 2,4
S	420 (6091)	25	10	REDSDN 25/10 S	WAL619098	33,0	41	53,5	38,0	36	22	46	22,3 x 2,4
S	420 (6091)	25	12	REDSDN 25/12 S	WAL619099	33,5	41	53,5	38,0	36	24	46	22,3 x 2,4
S	420 (6091)	25	14	REDSDN 25/14 S	WAL619100	34,0	43	57	39,5	36	27	46	22,3 x 2,4
S	420 (6091)	25	16	REDSDN 25/16 S	WAL619101	34,0	43	57	39,0	36	30	46	22,3 x 2,4
S	420 (6091)	25	20	REDSDN 25/20 S	WAL619102	35,0	45	60	39,0	36	36	46	22,3 x 2,4
S	400 (5801)	30	6	REDSDN 30/6 S	WAL619103	40,5	45	58,5	44,0	41	17	50	27,3 x 2,4
S	400 (5801)	30	8	REDSDN 30/8 S	WAL619104	41,0	45	58,5	44,0	41	19	50	27,3 x 2,4
S	400 (5801)	30	10	REDSDN 30/10 S	WAL619105	41,5	45	59	43,5	41	22	50	27,3 x 2,4
S	400 (5801)	30	12	REDSDN 30/12 S	WAL619106	41,5	45	59	43,5	41	24	50	27,3 x 2,4
S	400 (5801)	30	14	REDSDN 30/14 S	WAL619107	47,0	47	62,5	45,0	41	27	50	27,3 x 2,4

Série	Bar (psi)	D1	Tube d2	Désignation	Réf.	Kg par 100 p.	L5	L2	L1	S1	S2	S3	Joint tonique
S	400 (5801)	30	16	REDSDN 30/16 S	WAL619108	41,5	47	62,5	44,5	41	30	50	27,3 x 2,4
S	400 (5801)	30	20	REDSDN 30/20 S	WAL619109	43,0	49	65,5	44,5	41	36	50	27,3 x 2,4
S	400 (5801)	30	25	REDSDN 30/25 S	WAL619110	47,4	51	68,5	45,0	41	46	50	27,3 x 2,4
S	400 (5801)	38	6	REDSDN 38/6 S	WAL619111	57,0	46	62	47,5	50	17	60	35 x 2,5
S	400 (5801)	38	8	REDSDN 38/8 S	WAL619112	57,5	46	62	47,5	50	19	60	35 x 2,5
S	400 (5801)	38	10	REDSDN 38/10 S	WAL619113	58,0	46	62,5	47,0	50	22	60	35 x 2,5
S	400 (5801)	38	12	REDSDN 38/12 S	WAL619114	57,5	46	62,5	47,0	50	24	60	35 x 2,5
S	400 (5801)	38	14	REDSDN 38/14 S	WAL619115	67,2	48	66	48,5	50	27	60	35 x 2,5
S	400 (5801)	38	16	REDSDN 38/16 S	WAL619116	58,5	48	66	48,0	50	30	60	35 x 2,5
S	400 (5801)	38	20	REDSDN 38/20 S	WAL619117	59,0	50	69	48,0	50	36	60	35 x 2,5
S	400 (5801)	38	25	REDSDN 38/25 S	WAL619118	61,0	52	72	48,5	50	46	60	35 x 2,5
S	400 (5801)	38	30	REDSDN 38/30 S	WAL619119	67,5	54	75	49,0	50	50	60	35 x 2,5
S	800 (11603)	8	6	REDSDN 8/6 S	WAL619075	4,5	32,5	41,5	27,0	14	17	19	6 x 1,5
S	800 (11603)	10	6	REDSDN 10/6 S	WAL619076	6,5	33	42	27,5	17	17	22	8,5 x1.5
S	800 (11603)	10	8	REDSDN 10/8 S	WAL619077	6,5	33	42	27,5	17	19	22	8,5 x1.5
S	630 (9137)	12	6	REDSDN 12/6 S	WAL619078	8,5	35,5	44,5	30,0	19	17	24	10 x 1,5
S	630 (9137)	12	8	REDSDN 12/8 S	WAL619079	8,5	35,5	44,5	30,0	19	19	24	10 x 1,5
S	630 (9137)	12	10	REDSDN 12/10 S	WAL619080	8,0	35,5	55	29,5	19	22	24	10 x 1,5
S	630 (9137)	14	6	REDSDN 14/6 S	WAL619081	11,1	36,5	46	31,5	22	17	27	12x2
S	630 (9137)	14	8	REDSDN 14/8 S	WAL619082	11,5	36,5	46	31,5	22	19	27	12x2
S	630 (9137)	14	10	REDSDN 14/10 S	WAL619083	10,2	36,5	46,5	31,0	22	22	27	12x2
S	630 (9137)	14	12	REDSDN 14/12 S	WAL619084	10,8	36,5	46,5	31,0	22	24	27	12x2
S	630 (9137)	16	6	REDSDN 16/6 S	WAL619085	11,5	36,5	46,5	32,0	22	17	30	14 x 2
S	630 (9137)	16	8	REDSDN 16/8 S	WAL619086	12,0	36,5	46,5	32,0	22	19	30	14 x 2
S	630 (9137)	16	10	REDSDN 16/10 S	WAL619087	13,0	36,5	47	31,5	22	22	30	14 x 2
S	630 (9137)	16	12	REDSDN 16/12 S	WAL619088	13,0	36,5	47	31,5	22	24	30	14 x 2
S	630 (9137)	16	14	REDSDN 16/14 S	WAL619089	13,0	38,5	50,5	33,0	24	27	30	14 x 2
S	420 (6091)	20	6	REDSDN 20/6 S	WAL619090	16,2	40	50,5	36,0	27	17	36	17,3 x 2,4

Série	Bar (psi)	D1	Tube d2	Désignation	Réf.	Kg par 100 p.	L5	L2	L1	S1	S2	S3	Joint tonique
S	420 (6091)	20	8	REDSDN 20/8 S	WAL619091	18,5	40	50,5	36,0	27	19	36	17,3 x 2,4
S	420 (6091)	20	10	REDSDN 20/10 S	WAL619092	17,6	40	51	35,5	27	22	36	17,3 x 2,4
S	420 (6091)	20	12	REDSDN 20/12 S	WAL619093	19,0	40	51	35,5	27	24	36	17,3 x 2,4
S	420 (6091)	20	14	REDSDN 20/14 S	WAL619094	24,0	42	54,5	37,0	27	27	36	17,3 x 2,4
S	420 (6091)	20	16	REDSDN 20/16 S	WAL619095	19,2	42	54,5	36,5	27	30	36	17,3 x 2,4
L	500 (7252)	8	6	REDSDN 8/6 L	WAL619030	3,2	29	37,5	23,5	12	14	17	6x1,5
L	500 (7252)	10	6	REDSDN 10/6 L	WAL619031	4,0	31	39	25,0	14	14	19	8,5x1,5
L	500 (7252)	10	8	REDSDN 10/8 L	WAL619032	4,0	31	39,5	25,0	14	17	19	8,5x1,5
L	400 (5801)	12	6	REDSDN 12/6 L	WAL619033	6,0	31	39	25,0	14	14	22	10x1,5
L	400 (5801)	12	8	REDSDN 12/8 L	WAL619034	5,5	31	39,5	25,0	17	17	22	10x1,5
L	400 (5801)	12	10	REDSDN 12/10 L	WAL619035	5,5	32	40,5	26,0	17	19	22	10x1,5
L	400 (5801)	15	6	REDSDN 15/6 L	WAL619036	8,5	34,5	42,5	28,5	22	14	27	12x2
L	400 (5801)	15	8	REDSDN 15/8 L	WAL619037	9,5	34,5	43	28,5	22	17	27	12x2
L	400 (5801)	15	10	REDSDN 15/10 L	WAL619038	9,0	35,5	44	29,5	22	19	27	12x2
L	400 (5801)	15	12	REDSDN 15/12 L	WAL619039	9,0	35,5	43,5	29,5	22	22	27	12x2
L	400 (5801)	18	6	REDSDN 18/6 L	WAL619040	11,2	33,5	42	28,0	24	14	32	15x2
L	400 (5801)	18	8	REDSDN 18/8 L	WAL619041	11,5	33,5	42,5	28,0	24	17	32	15x2
L	400 (5801)	18	10	REDSDN 18/10 L	WAL619042	13,0	34,5	43,5	29,0	24	19	32	15x2
L	400 (5801)	18	12	REDSDN 18/12 L	WAL619043	15,5	34,5	43	29,0	24	22	32	15x2
L	400 (5801)	18	15	REDSDN 18/15 L	WAL619044	12,2	35,5	45	30,0	24	27	32	15x2
L	250 (3626)	22	6	REDSDN 22/6 L	WAL619045	16,0	37,5	46	32,0	27	14	36	20x2
L	250 (3626)	22	8	REDSDN 22/8 L	WAL619046	16,0	37,5	46,5	32,0	27	17	36	20x2
L	250 (3626)	22	10	REDSDN 22/10 L	WAL619047	16,0	38,5	47,5	33,0	27	19	36	20x2
L	250 (3626)	22	12	REDSDN 22/12 L	WAL619048	16,0	38,5	47	33,0	27	22	36	20x2
L	250 (3626)	22	15	REDSDN 22/15L	WAL619049	18,5	39,5	49	34,0	27	27	36	20x2
L	250 (3626)	22	18	REDSDN 22/18 L	WAL619050	18,0	39,5	49,5	33,5	27	32	36	20x2
L	250 (3626)	28	6	REDSDN 28/6 L	WAL619051	29,0	39,5	48	34,0	36	14	46	26 x2
L	250 (3626)	28	8	REDSDN 28/8 L	WAL619052	29,0	39,5	48,5	34,0	36	17	46	26 x2

Série	Bar (psi)	D1	Tube d2	Désignation	Réf.	Kg par 100 p.	L5	L2	L1	S1	S2	S3	Joint tonique
L	250 (3626)	28	10	REDSDN 28/10 L	WAL619053	27,5	40,5	49,5	35,0	36	19	46	26 x2
L	250 (3626)	28	12	REDSDN 28/12 L	WAL619054	28,0	40,5	49	35,0	36	22	46	26 x2
L	250 (3626)	28	15	REDSDN 28/15 L	WAL619055	28,0	41,5	51	36,0	36	27	46	26 x2
L	250 (3626)	28	18	REDSDN 28/18 L	WAL619056	28,5	41,5	51,5	35,5	36	32	46	26 x2
L	250 (3626)	28	22	REDSDN 28/22 L	WAL619057	31,0	43,5	53,5	37,5	36	36	46	26 x2
L	250 (3626)	35	6	REDSDN 35/6 L	WAL619058	35,0	41	51	37,0	46	14	50	32 x 2,5
L	250 (3626)	35	8	REDSDN 35/8 L	WAL619059	32,4	41	51,5	37,0	46	17	50	32 x 2,5
L	250 (3626)	35	10	REDSDN 35/10 L	WAL619060	36,0	42	52,5	38,0	46	19	50	32 x 2,5
L	250 (3626)	35	12	REDSDN 35/12 L	WAL619061	33,5	42	52	38,0	46	22	50	32 x 2,5
L	250 (3626)	35	15	REDSDN 35/15 L	WAL619062	34,0	43	54	39,0	46	27	50	32 x 2,5
L	250 (3626)	35	18	REDSDN 35/18 L	WAL619063	34,5	43	54,5	38,5	46	32	50	32 x 2,5
L	250 (3626)	35	22	REDSDN 35/22 L	WAL619064	35,0	45	56,5	40,5	46	36	50	32 x 2,5
L	250 (3626)	35	28	REDSDN 35/28 L	WAL619065	37,0	45	56,5	40,5	46	41	50	32 x 2,5
L	250 (3626)	42	6	REDSDN 42/6 L	WAL619066	49,5	44	54,5	40,5	50	14	60	38 x 2,5
L	250 (3626)	42	8	REDSDN 42/8 L	WAL619067	51,8	44	55	40,5	50	17	60	38 x 2,5
L	250 (3626)	42	10	REDSDN 42/10 L	WAL619068	50,0	45	56	41,5	50	19	60	38 x 2,5
L	250 (3626)	42	12	REDSDN 42/12 L	WAL619069	50,0	45	55,5	41,5	50	22	60	38 x 2,5
L	250 (3626)	42	15	REDSDN 42/15 L	WAL619070	46,0	46	57,5	42,5	50	27	60	38 x 2,5
L	250 (3626)	42	18	REDSDN 42/18 L	WAL619071	46,5	46	58	42,0	50	32	60	38 x 2,5
L	250 (3626)	42	22	REDSDN 42/22 L	WAL619072	48,5	48	60	44,0	50	36	60	38 x 2,5
L	250 (3626)	42	28	REDSDN 42/28 L	WAL619073	49,0	48	60	44,0	50	41	60	38 x 2,5
L	250 (3626)	42	35	REDSDN 42/35 L	WAL619074	55,0	50	63,5	43,0	50	50	60	38 x 2,5