


Produits > Instrumentation > Raccords double bague > Doubles bagues Hy-Lok > Adaptateur pour tube

Lapped Flange Connector

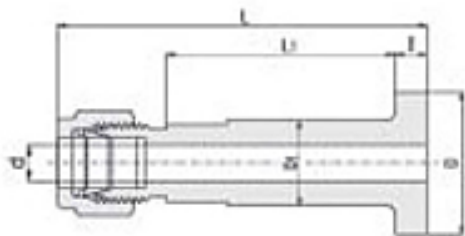

Part Number	Tube size	Dimension D	Dimension d ₁	Dimension L	Dimension I	Dimension L ₁	Flange Seal	Flange Surface Finish (Ra)	Material	Min. d
CFTC4-SM-S316	1/4 in	35.0 mm	22.2 mm	80.8 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	316 Stainless Steel	4.8 mm
CFTC4-SE-S316	1/4 in	35.0 mm	22.2 mm	80.8 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	316 Stainless Steel	4.8 mm
CFTC6-SM-S316	3/8 in	35.0 mm	22.2 mm	82.3 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	316 Stainless Steel	7.1 mm
CFTC6-SE-S316	3/8 in	35.0 mm	22.2 mm	82.3 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	316 Stainless Steel	7.1 mm
CFTC8-SM-S316	1/2 in	35.0 mm	22.2 mm	84.8 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	316 Stainless Steel	10.4 mm
CFTC8-SE-S316	1/2 in	35.0 mm	22.2 mm	84.8 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	316 Stainless Steel	10.4 mm
CFTC4-SM-STEL	1/4 in	35.0 mm	22.2 mm	80.8 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	Carbon Steel	4.8 mm
CFTC4-SE-STEL	1/4 in	35.0 mm	22.2 mm	80.8 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	Carbon Steel	4.8 mm
CFTC6-SM-STEL	3/8 in	35.0 mm	22.2 mm	82.3 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	Carbon Steel	7.1 mm
CFTC6-SE-STEL	3/8 in	35.0 mm	22.2 mm	82.3 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	Carbon Steel	7.1 mm
CFTC8-SM-STEL	1/2 in	35.0 mm	22.2 mm	84.8 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	Carbon Steel	10.4 mm
CFTC8-SE-STEL	1/2 in	35.0 mm	22.2 mm	84.8 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	Carbon Steel	10.4 mm

Part Number	Tube size	Dimension D	Dimension d ₁	Dimension L	Dimension I	Dimension L ₁	Flange Seal	Flange Surface Finish (Ra)	Material	Min. d
CFTC4-SM-BRAS	1/4 in	35.0 mm	22.2 mm	80.8 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	Brass	4.8 mm
CFTC4-SE-BRAS	1/4 in	35.0 mm	22.2 mm	80.8 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	Brass	4.8 mm
CFTC6-SM-BRAS	3/8 in	35.0 mm	22.2 mm	82.3 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	Brass	7.1 mm
CFTC6-SE-BRAS	3/8 in	35.0 mm	22.2 mm	82.3 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	Brass	7.1 mm
CFTC8-SM-BRAS	1/2 in	35.0 mm	22.2 mm	84.8 mm	6.5 mm	56.5 mm	SM (Smooth)	3.2 - 6.3 µm	Brass	10.4 mm
CFTC8-SE-BRAS	1/2 in	35.0 mm	22.2 mm	84.8 mm	6.5 mm	56.5 mm	SE (Serrated)	6.3 - 12.5 µm	Brass	10.4 mm