


Produits > Hydraulique > Raccords > JIC 37°

Union femelle

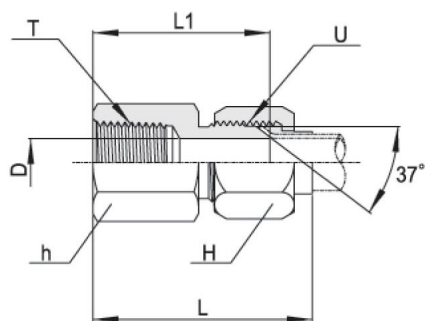

Référence	Tube O.D.	Dimension D	Dimension H (Hex)	Dimension h (Hex)	Dimension L	Dimension L1	Material	T (NPT)	Unified National Fine Thread (U)
FFC2T-01N-S316	1/8 in 3 mm	1.6 mm	9.5 mm	14.2 mm	36.20 mm	28.4 mm	316 Stainless Steel	1/8 in	5/16"-24
FFC3T-01N-S316	3/16 in 4 mm	3.2 mm	11 mm	14.2 mm	38.10 mm	28.7 mm	316 Stainless Steel	1/8 in	3/8"-24
FFC4T-01N-S316	1/4 in 6.0 mm	4.4 mm	14.2 mm	14.2 mm	39.3 mm	30.2 mm	316 Stainless Steel	1/8 in	7/16"-20
FFC5T-01N-S316	5/16 in 8.0 mm	6.0 mm	15.8 mm	14.2 mm	40.1 mm	29.7 mm	316 Stainless Steel	1/8 in	1/2"-20
FFC6T-02N-S316	3/8 in 10.0 mm	7.5 mm	17.4 mm	19.0 mm	47.5 mm	35.6 mm	316 Stainless Steel	1/4 in	9/16"-18
FFC8T-03N-S316	1/2 in 12.0 mm	9.9 mm	22.2 mm	22.2 mm	52.30 mm	39.6 mm	316 Stainless Steel	3/8 in	3/4"-16
FFC10T-04N-S316	5/8 in 16.0 mm	12.3 mm	25.4 mm	28.5 mm	64.60 mm	48.0 mm	316 Stainless Steel	1/2 in	7/8"-14

Référence	Tube O.D.	Dimension D	Dimension H (Hex)	Dimension h (Hex)	Dimension L	Dimension L1	Material	T (NPT)	Unified National Fine Thread (U)
FFC12T-06N-S316	3/4 in 18 mm 20 mm	15.5 mm	31.7 mm	34.9 mm	67.8 mm	52.3 mm	316 Stainless Steel	3/4 in	1 1/16"-12
FFC14T-06N-S316	7/8 in 22 mm	18 mm	34.9 mm	34.9 mm	69.9 mm	52.3 mm	316 Stainless Steel	3/4 in	1 3/16"-12
FFC16T-08N-S316	1 in 25 mm	21.5 mm	38.1 mm	41.2 mm	78.7 mm	59.7 mm	316 Stainless Steel	1 in	1 5/16"-12
FFC20T-10N-S316	1 1/4 in 32 mm	37.5 mm	50.8 mm	50.6 mm	81.7 mm	63.2 mm	316 Stainless Steel	1 1/4 in	1 5/8"-12
FFC24T-12N-S316	1 1/2 in 38 mm	33.0 mm	57.1 mm	60.3 mm	93.2 mm	66.5 mm	316 Stainless Steel	1 1/2 in	1 7/8"-12
FFC32T-16N-S316	2 in 50 mm	45.0 mm	73 mm	73 mm	102.9 mm	75.4 mm	316 Stainless Steel	2 in	2 1/2"-12